


- SPECIFICATION**
- Voltage rating: 250V AC, DC
 - Current Rating: 5A, AC, DC
 - Withstand voltage: 1500V AC/minute
 - Contact resistance: 10mΩ max
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +105° C
- WAFER**
- Material: Base, PA46/PA66/LCP UL94V-0
 - Contact, Tin-plated

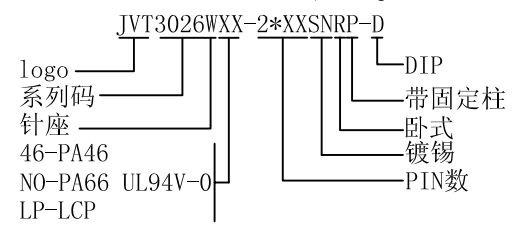

Poles	DIM (mm)	
	A	B
2*1	---	6.65
2*2	3.00	9.65
2*3	6.00	12.65
2*4	9.00	15.65
2*5	12.00	18.65
2*6	15.00	21.65
2*7	18.00	24.65
2*8	21.00	27.65
2*9	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

乔业电子有限公司
CHYAO YEE CONNECTORS CO., L TD

版本: _____ 日期: _____ 单位: mm 比例: 1:1 日期: 20130710

核准	审核	绘图	品名	MOLEX3.0mm 双排 WAFER		
	bolly	许向毅	料号	JVT3026WXX-2*XXSNRP-D		
			图名	054	版本	A