

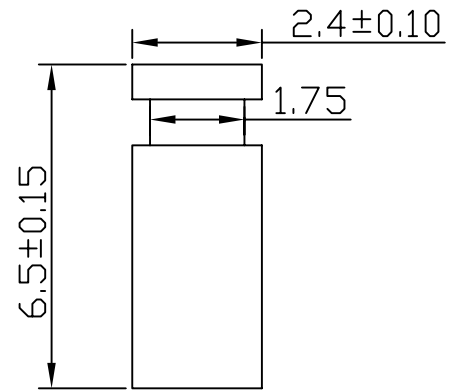



A B C D E F G H

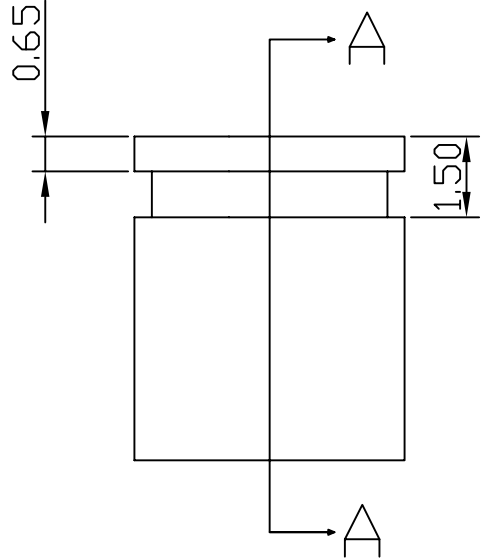


SECTION A-A

Material:
Insulator: Glass filled PBT (UL94V-0), Black
Contacts: Brass
Plating: Au or Sn over 50u'' Ni
Electrical Characteristics:
Contact Resistance: 20mΩ Max.
Insulator Resistance: 1000MΩ Min.
Withstanding Voltage: AC 500V
Current Rating: 3 AMP
Operating Temperature: -40°C to +105°C

JVT2541HPT-02BK-A
 logo ——— A-区分码
 系列码 ——— BK-黑色
 胶壳 ———
 PT-PBT ——— PIN数



GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

		 乔业电子有限公司 CHYAO YEE CONNECTORS CO.,L TD		核准	审核	设计	品名	2.54mm 短路帽 闭口		
					陈宁亮	李勇军	料号	JVT2541HPT-02BK-A		
版本	变更内容	日期	 单位 mm 比例 1:1 日期 2014.04.29			图名	100	版本	A	

A B C D E F G H